



## SPECIFICATIONS

BATTERY MODEL		TERMINAL OPTIONS	CASE MATERIAL OPTIONS
NP10-6		Faston .187 (F1) Faston .250 (F2)	UL 94 V-0 UL 94 HB
Nominal voltage (V)			6
20-hr rate Capacity to 5.25V at 25°C (77°F) (Ah)			10.0
10-hr rate Capacity to 5.25V at 25°C (77°F) (Ah)			9.3
DIMENSIONS			
Length			151mm (5.94 in.)
Width			50mm (1.97 in.)
Height over terminals			97.5mm (3.84 in.)
Weight			1.75kg (3.86 lbs.)
OPERATING TEMPERATURE RANGE			
Storage (in fully charged condition)			-20°C to +60°C (-4°F to +140°F)
Charge			-15°C to +50°C (5°F to +122°F)
Discharge			-20°C to +60°C (-4°F to +140°C)
STORAGE			
Capacity loss per month at 25°C (77°F) (% approx.)			3
CHARGE VOLTAGE			
Float charge voltage at 25°C (77°F) (V)/Battery			6.83 (±1%)
Float charge voltage at 25°C (77°F) (V)/Cell			2.275 (±1%)
Float charge voltage temperature correction factor from standard 25°C (77°F) (mV)			-3
Cyclic (or Boost) charge voltage at 25°C (77°F) (V)/Battery			7.25 (±3%)
Cyclic (or Boost) charge voltage at 25°C (77°F) (V)/Cell			2.42 (±3%)
Cyclic charge voltage temperature correction factor from standard 25°C (77°F) (mV)			-4
CHARGE CURRENT			
Maximum charge current (A)			2.5
DISCHARGE CURRENT			
Maximum continuous discharge current, 5 sec. (A)			150
Short circuit current (A)			400
IMPEDANCE			
Measured at 1 kHz (mΩ)			7.5
DESIGN LIFE			
Yuasa design life at 25°C (77°F)			up to 5 yrs



### TERMINALS



### LAYOUT



### 3RD PARTY CERTIFICATION

ISO 9001 Certificate  
ISO 14001 Certificate  
TAA Compliant – Made in Taiwan  
DRC Conflict Free

### LONG SHELF LIFE

The extremely low self discharge rate allows the battery to be stored for extended periods up to one year at normal ambient temperatures with no permanent loss of capacity.

### FLOAT SERVICE LIFE

The expected service life is five years in float standby applications.







# NP10-6

## DISCHARGE CHARACTERISTICS


Discharge Characteristics Curves at 25°C

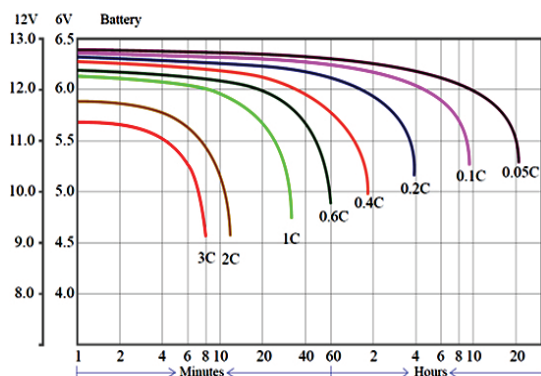


## FLOAT SERVICE LIFE

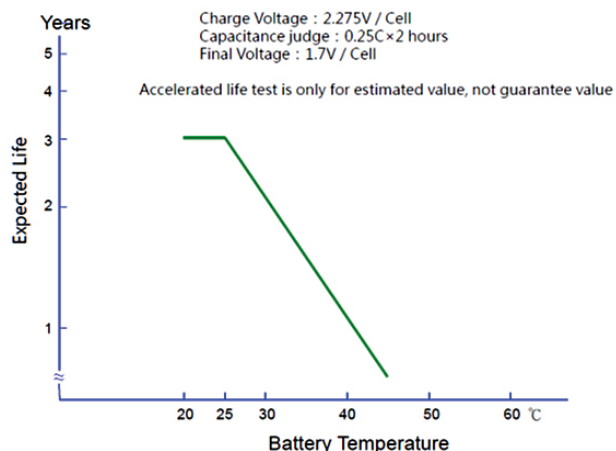

## CHARGE CHARACTERISTICS

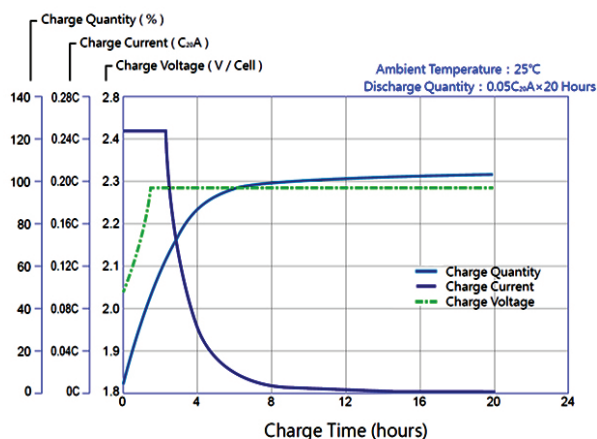

## CHARGE VOLTAGE

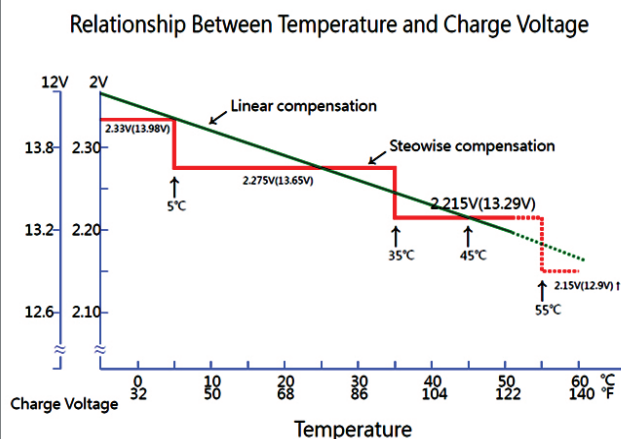

**WARNING:** Cancer and Reproductive Harm. Wash hands after handling. [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

### ABOUT GS YUASA ENERGY SOLUTIONS, INC.

GS Yuasa Energy Solutions, Inc. is an American subsidiary of GS Yuasa Corporation, the world's second largest battery company and a 100+ year old Japanese corporation. GS Yuasa Energy Solutions (GYES) was formed in 2019 to address the growing energy storage and reserve power markets. GYES brings together and leverages GS Yuasa Group's advanced technologies with proven American market successes in lithium, telecom, UPS, alarm & security, and energy storage into a single business unit.



GS Yuasa Energy Solutions, Inc.  
1150 Northmeadow Pkwy. Suite 110  
Roswell, GA 30076 (800) 472-2879  
[www.gsyuasa-es.com](http://www.gsyuasa-es.com)

