


SPECIFICATIONS

BATTERY MODEL	TERMINAL OPTIONS	CASE MATERIAL OPTIONS
NPY5-12	Faston .187 (F1) Faston .250 (F2)	UL 94 V-0 UL 94 HB
Nominal voltage (V)		12
20-hr rate Capacity to 10.5V at 25°C (77°F) (Ah)		5
10-hr rate Capacity to 10.5V at 25°C (77°F) (Ah)		4.7
DIMENSIONS		
Length		90mm (3.54 in.)
Width		70mm (2.76 in.)
Height over terminals		107mm (4.21 in.)
Weight		1.35kg (2.98 lbs.)
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)		-15°C to +40°C (5°F to +104°F)
Charge		0°C to +40°C (32°F to +104°F)
Discharge		-15°C to +45°C (5°F to +113°F)
STORAGE		
Capacity loss per month at 25°C (77°F) (% approx.)		3
CHARGE VOLTAGE		
Float charge voltage at 25°C (77°F) (V)/Battery		13.8 (±1%)
Float charge voltage at 25°C (77°F) (V)/Cell		2.3 (±1%)
Float charge voltage temperature correction factor from standard 25°C (77°F) (mV)		-3
Cyclic (or Boost) charge voltage at 25°C (77°F) (V)/Battery		14.7 (±1%)
Cyclic (or Boost) charge voltage at 25°C (77°F) (V)/Cell		2.45 (±1%)
Cyclic charge voltage temperature correction factor from standard 25°C (77°F) (mV)		-4
CHARGE CURRENT		
Maximum charge current (A)		1.5
DISCHARGE CURRENT		
Maximum continuous discharge current, 5 sec. (A)		50
Short circuit current (A)		250
TEST VALUE		
Internal Resistance (mΩ)		42
DESIGN LIFE		
YUVOLT design life at 25°C (77°F)		up to 3 yrs




TERMINALS

FASTON TAB .187 (F1)



FASTON TAB .250 (F2)



LAYOUT




3RD PARTY CERTIFICATION
 ISO 9001 Certificate
 ISO 14001 Certificate
 DRC Conflict Free



DISCHARGE CHARACTERISTICS


Discharge Curves at 25°C

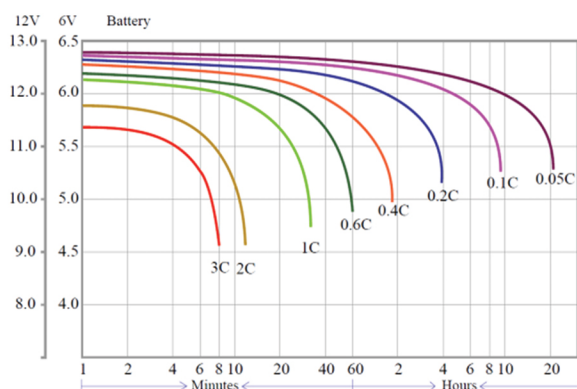

DESIGN LIFE


Charge Voltage : 2.275V / Cell
Capacitance Test : 0.25Cx2 hours
Final Voltage : 1.70V / Cell

Accelerated life test is only for estimated value, not guarantee value

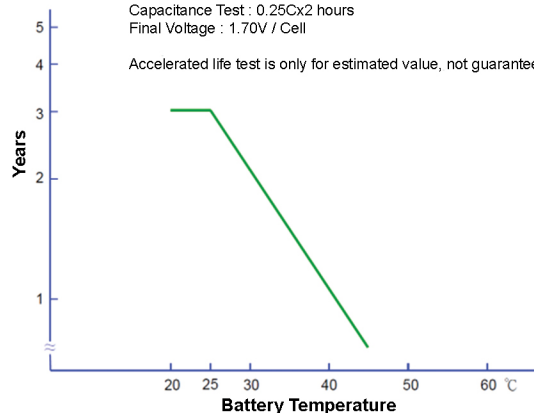


CHARGE CHARACTERISTICS

Temperature: 25°C (77°F)

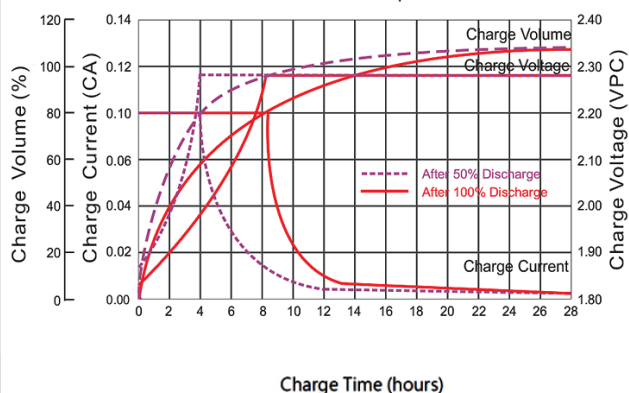

CHARGE VOLTAGE

Relationship Between Temperature and Charge Voltage

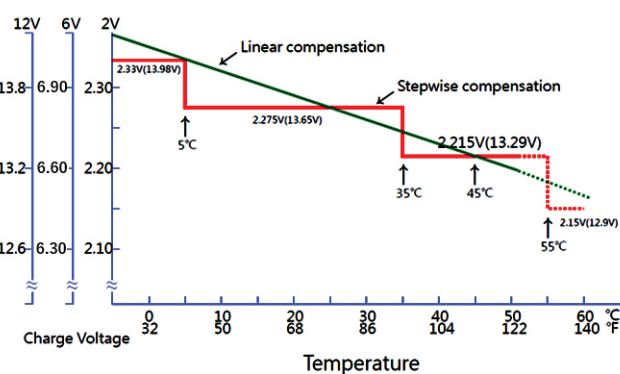

WARNING: Cancer and Reproductive Harm. Wash hands after handling. www.P65Warnings.ca.gov

ABOUT GS YUASA ENERGY SOLUTIONS, INC.

GS Yuasa Energy Solutions, Inc. is an American subsidiary of GS Yuasa Corporation, the world's second largest battery company and a 100+ year old Japanese corporation. GS Yuasa Energy Solutions (GYES) was formed in 2019 to address the growing energy storage and reserve power markets. GYES brings together and leverages GS Yuasa Group's advanced technologies with proven American market successes in lithium, telecom, UPS, alarm & security, and energy storage into a single business unit.



GS Yuasa Energy Solutions, Inc.
1150 Northmeadow Pkwy. Suite 110
Roswell, GA 30076 (800) 472-2879
www.gsyuasa-es.com

