

PYL12V80TT 12V 80Ah-8Hr HIGH TEMPERATURE SUPER LONG LIFE BATTERY with HT X AlloyTM

TECHNICAL DATA SHEET

HIGH TEMPERATURE LONG LIFE DESIGN

- + *HT X Alloy*TM extends life in high temp applications
- + Additives to maintain compression
- + Designed to control charging current as temperature increases

SAFETY + UL 94V-0

+ UL 1989

- + No thermal runaway
- + Epoxy sealed terminals to prevent post leaks
- + Rugged ABS cases to minimize handling damage

10+ YEAR DESIGN LIFE

- + Exceeds Telcordia GR-1200 criteria
- + Greater than 5 years at 35°C

COMPLIANCE

- + VZ TPR-9802
- + GR-4228
- + GR-1089
- + GR-63 NEBS



SPECIFICATIONS

| | MODEL | NOMINAL VOLTAGE (V) | *RATED CAPACITY at 8 Hr (Ah) | ** OPERATING RANGE | L | | w | | н | | тн | | WEIGHT | | |
|--|------------|---------------------------|---------------------------------------|-------------------------------|-----|------|-----|-----|-----|-----|-----|-----|--------|------|-------------|
| | | | | | mm | in. | mm | in. | mm | in. | mm | in. | kg | lbs. | TERMINAL |
| | PYL12V80TT | 12 | 80 | -40 to 65°C (-40 to 149°F) | 259 | 10.2 | 168 | 6.6 | 212 | 8.4 | 212 | 8.4 | 27.0 | 59.5 | Top-M6 Bolt |

*Maximum Charge Current is 25% of the 8 Hr. Rate

**Refer to Product Manual for optimum temperature range

AMPERES TO FINAL VOLTAGE: 1.75V@25°C (77°F)

| MODEL | | DISCHARGE TIME (Hr) | | | | | | | | | | | |
|------------|------|---------------------|------|------|------|------|------|-----|-----|-----|-----|--|--|
| MODEL | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 20 | | |
| PYL12V80TT | 32.4 | 23.1 | 18.4 | 15.5 | 13.5 | 11.6 | 10.0 | 9.0 | 8.2 | 7.1 | 4.3 | | |

WATTS TO FINAL VOLTAGE: 1.75V@25°C (77°F)

| MODEL | DISCHARGE TIME (Hr) | | | | | | | | | | | |
|------------|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|--|
| WODEL | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 20 | |
| PYL12V80TT | 405 | 289 | 231 | 196 | 159 | 139 | 123 | 112 | 102 | 87 | 54 | |








PYL12V80TT 12V 80Ah-8Hr HIGH TEMPERATURE SUPER LONG LIFE

BATTERY with *HT X Alloy*TM units: mm

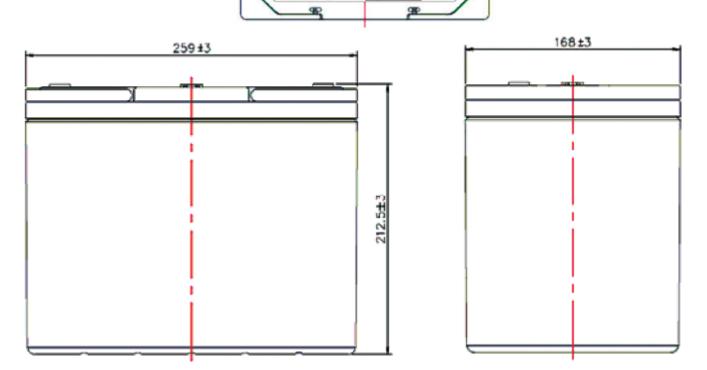

PORTALAC

C GS PYL12V80TT

4

10 (P.

- Float Charge Voltage: 13.65 ±0.15 @ 25°C
- Temperature Compensation: Adjust float charge voltage +3mV/°C/cell for temperatures <25°C; -3mV/°C/cell for temperatures >25°C.
- Internal Resistance: Approximately 4.7mΩ measured with 1kHz AC bridge
- Terminal Hardware Torque: 43.4 in-lbs. (4.9 Nm)

ABOUT GS YUASA ENERGY SOLUTIONS, INC.

GS Yuasa Energy Solutions, Inc. is an American subsidiary of GS Yuasa Corporation, the world's second largest battery company and a 100+ year old Japanese corporation. GS Yuasa Energy Solutions (GYES) was formed in 2019 to address the growing energy storage and reserve power markets. GYES brings together and leverages GS Yuasa Group's advanced technologies with proven American market successes in lithium, telecom, UPS, alarm & security, and energy storage into a single business unit.



GS Yuasa Energy Solutions, Inc. 1150 Northmeadow Pkwy. Suite 110 Roswell, GA 30076 (800) 472-2879 www.gsyuasa-es.com

